

STRIATION STONE



Play with light and shadow with these three-dimensional Striation ceramic wall tiles. Striation Stone is available in three stone effect colours in a 75x300mm flat format and two three-dimensional formats, to add effortless dimension and character to interior designs. Available in a natural finish, Striation Stone is suitable for internal wall applications.



Shade variation- V2 moderate



OOAB41880T1



OOAB41880T2




OOAB41880T3



OOAB41881T1




OOAB41881T2




OOAB41881T3



OOAB41882T1



OOAB41882T2



OOAB41882T3




	SIZE (mm)	> <	FINISHES
1	75x300 T1	8mm	NAT
2	75x300 T2	8-15.5mm	NAT
3	75x300 T3	8-15.5mm	NAT
4	8x300 EDGE	8mm	NAT
5	8x8 EDGE CORNER	8mm	NAT

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Find us on:



www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk

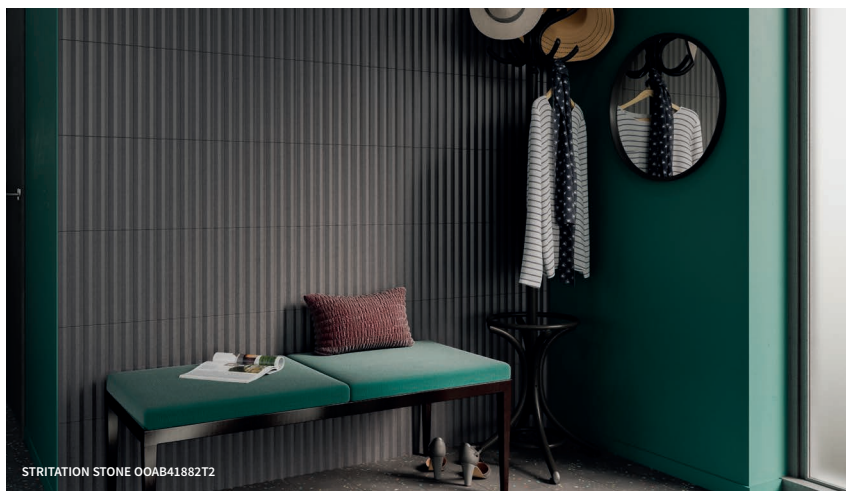

LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

STUDIO 329 (APPOINTMENT ONLY)
Business Design Centre, 52 Upper Street,
Islington, London, N1 0QH

POP-UP STUDIO (UNMANNED/ WALK-INS)
The Building Centre, 26 Store Street,
London, WC1E 7BT



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	(W 74 mm +/- 0,75 mm x 300 mm +/- 0,5 %) GL	11	Crazing resistance	Pass
3	Water absorption	>10%	13	Chemical resistance	GHA
4	Modulus of rupture and breaking strength	Minimum 15 N/mm ² Individual Minimum 12 N/mm ²	14	Stain resistance	Class 5

SUSTAINABILITY INFORMATION



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

