


TRANQUILA

- Gloss and matt glazed tiles
- Suitable for internal wall applications
- V3 high shade variation and a slight undulated surface texture
- Contains 55% recycled material and EPD verified 

www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk



MATT



ADHM35738

ADHM35739


ADHM35740

ADHM35741

ADHM35742

ADHM35743

GLOSS



ADHG35744

ADHG35745

ADHG35746


ADHG35747

ADHG35748



ADHG35749



Due to the nature of the tile, a certain amount of variation in color, shading, surface and texture are to be expected.

	SIZES (mm)	> <	FINISHES	
1	65x260	7.5mm	MATT	GLOSS
2	130x130	7.5mm	MATT	GLOSS
3	65x130	7.5mm	MATT	GLOSS
4	100x260 SK-12	7.5mm	MATT	GLOSS
5	ECSK-12	7.5mm	MATT	GLOSS
6	50x260 MOLD	7.5mm	MATT	GLOSS
7	MOLDEND	7.5mm	MATT	GLOSS
8	MOLDFC	7.5mm	MATT	GLOSS
9	25x260 QR-22	7.5mm	MATT	GLOSS
10	QRC-22	7.5mm	MATT	GLOSS
11	15x260 LIST12	7.5mm	MATT	GLOSS
12	14x260 JOLLY	7.5mm	MATT	GLOSS
13	JOLLYC	7.5mm	MATT	GLOSS

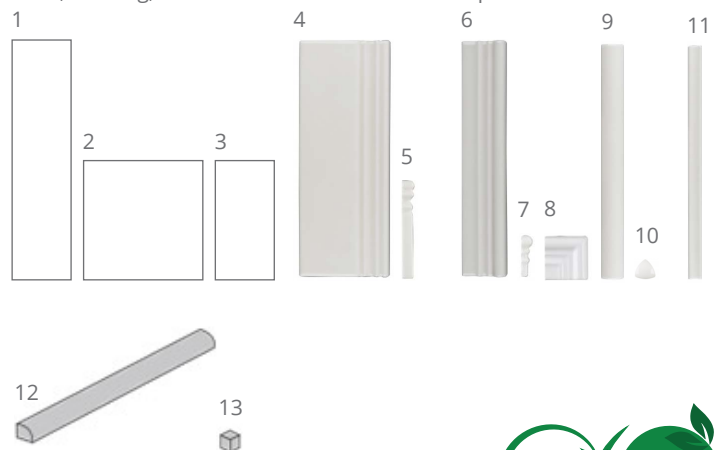

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:    

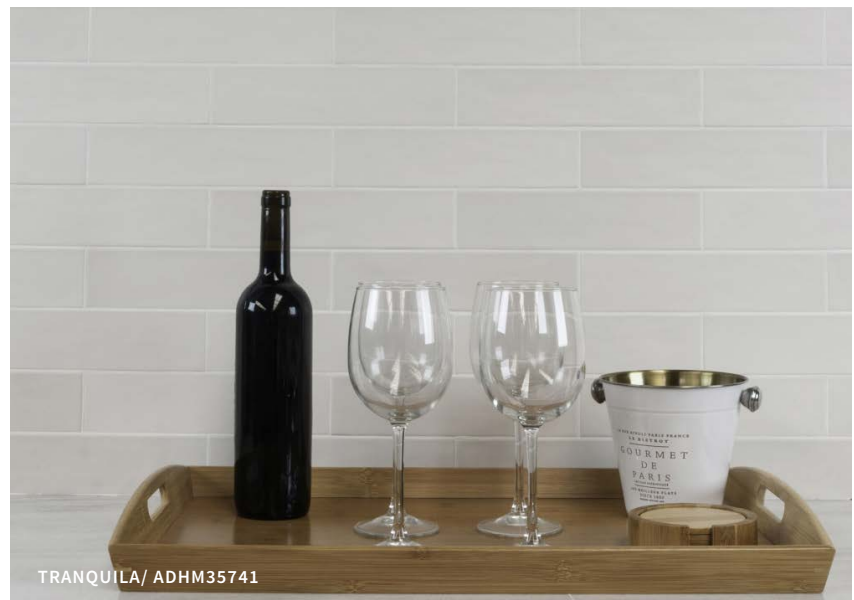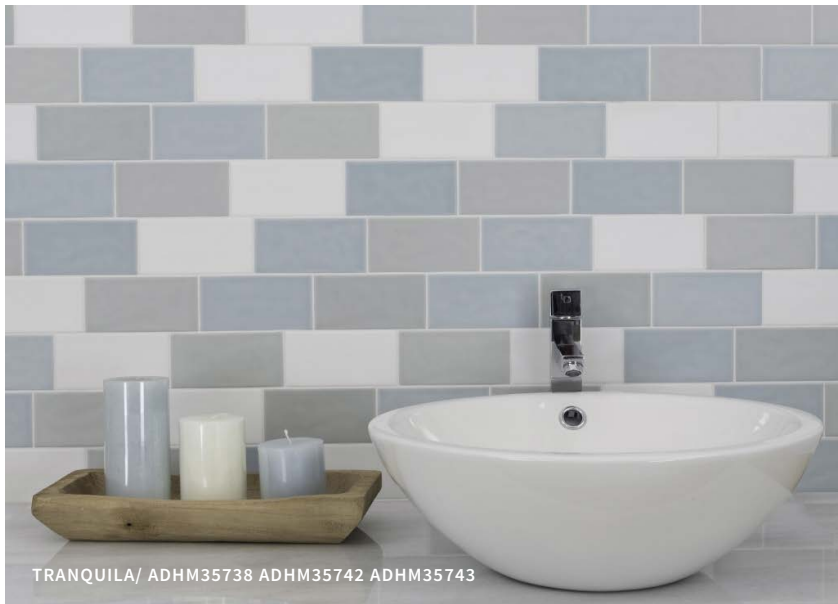

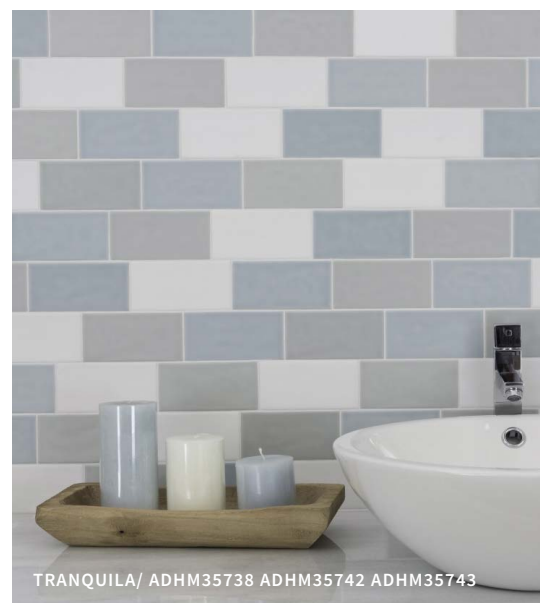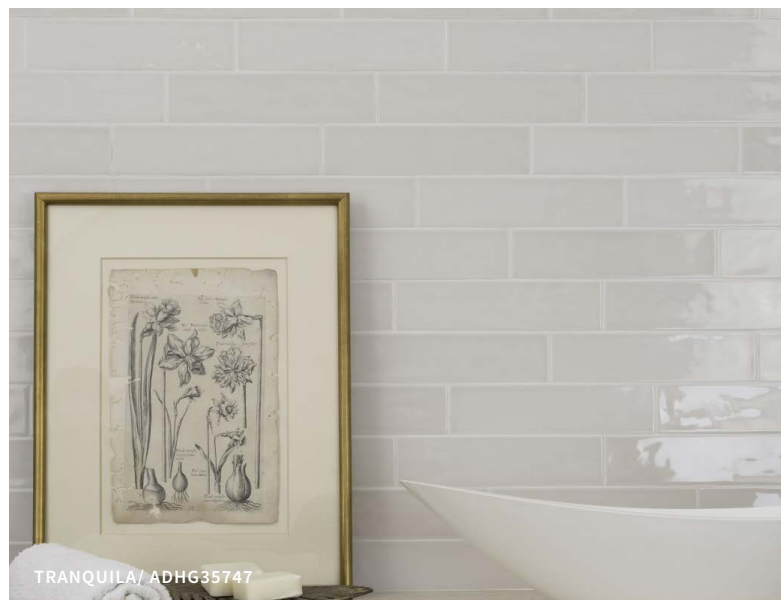

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	Conforms
Water absorption	ISO 10545-3	Conforms
Bending strength	ISO 10545-4	Conforms
Chemical resistance	ISO 10545-14	Resistant

SUSTAINABILITY INFORMATION

MATERIAL	RECYCLED CONTENT	EPD	ISO 14001:2015 – ENVIRONMENTAL MANAGEMENT
Ceramic tiles	55%	Yes	Yes



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	• Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	• Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well