

Material: **Porcelain** | Appearance: **Stone effect** | Application: **Walls and Floors**



Grond One

Earthy clay shades and textures; these Grond One porcelain tiles are suitable for both internal and external areas for seamless application. The range combines earthy toned porcelain stone with clay effect textures for a truly unique, and authentic style. Four finishes Natural R10, Brushed R10, Thick R11/C and Structured R11/C and eleven sizes, including a 1200x2800 large format and some external 20mm thick sizes.



Shade variation: V2 - V3



KAAA49400
LRV 52



KAAA49401
LRV 30




KAAA49402
LRV 16



KAAA49403
LRV 12



KAAA49404
LRV 21

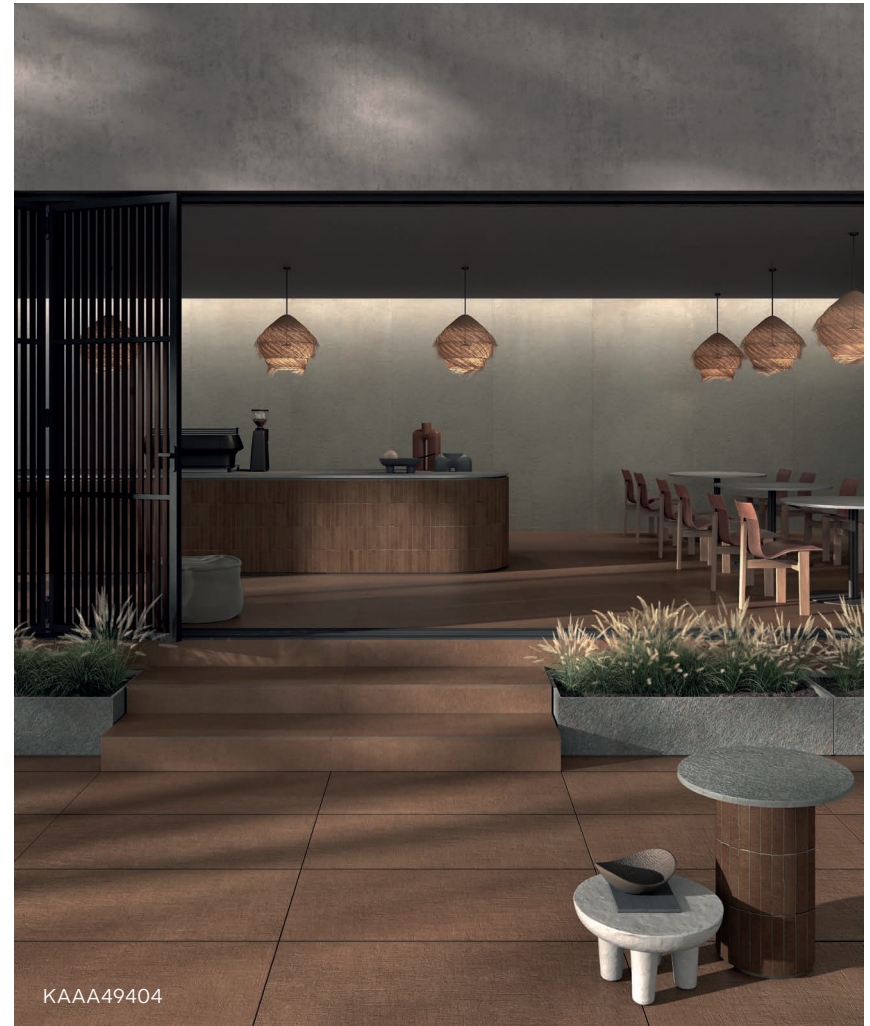

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Grond One



Formats

	Sizes (mm)	Thickness	 PTV Wet Slider 96
1	1200x2800	6mm	Brushed ≥ 36 PTV
2	800x1800	10mm	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
3	1200x1200	10mm	Brushed ≥ 36 PTV
4	600x1200	10mm	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
5	600x1200 THK	20mm	Thick ≥ 36 PTV
6	600x600	10mm	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
7	600x600 THK	20mm	Thick ≥ 36 PTV
8	202x304 THK	20mm	Thick ≥ 36 PTV
9	202x202 THK	20mm	Thick ≥ 36 PTV
10	46x600 SK1	10mm	Natural ≥ 36 PTV
11	300x600 SK2 THK	20mm	Thick ≥ 36 PTV

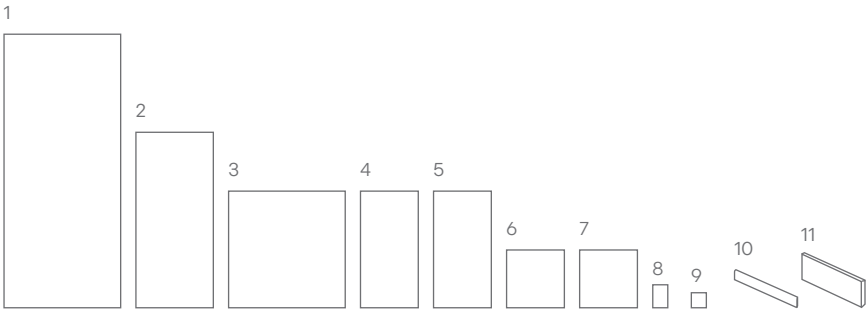

Material: **Porcelain** | Appearance: **Stone effect** | Application: **Walls and Floors**



Grond One



Above
KAAA49402

Right
KAAA49400



Above
KAAA49403THK

LRV and PTV values can vary batch to batch, please contact for advice.
Switch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Grond One

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	$E \leq 0,04 \%$
4	Flexural strength Breaking strength	10mm: 50 N/mm ² 6mm: 52 N/mm ²
6	Resistance to deep abrasion	10mm: 3200 N 6mm: 1350 N
8	Linear thermal expansion	$A=7 \times 10^{-6} / ^\circ\text{C}$
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Unaffected
14	Stain resistance	Class 5
	Slip resistance	NAT R10 BRU R10 STR R11/C THK R11/C ≥ 36 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.