


Material: **Glazed porcelain** | Appearance: **Brick** | Application: **Walls and Floors**



Carlton

Carlton is available in a curated palette of 12 colours, presented in an elongated 48x450mm format that echoes the character of traditional brick. With its timeless appeal, Carlton brings the texture and warmth of brick cladding into contemporary design - perfect for both residential and commercial spaces.

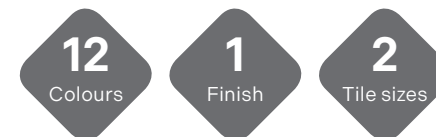

Shade variation: V1-V3



RBCC53810 LRV: 73	RBCC53811 LRV: 24	RBCC53812 LRV: 5	RBCC53813 LRV: 14
RBCC53814 LRV: 49	RBCC53815 LRV: 43	RBCC53816 LRV: 40	RBCC53817 LRV: 20
RBCC53818 LRV: 15	RBCC53819 LRV: 14	RBCC53820 LRV: 27	RBCC53821 LRV: 34



Sizes (mm)	Thickness	PTV Wet Slider 96	PTV Wet Slider 55
1 48x450	9.5	Natural ≥ 40PTV	Natural ≥ 40PTV
2 100x350x48	9.5	Natural ≥ 40PTV	Natural ≥ 40PTV

* Lay with 5mm joint



Carlton RBCC53810 RBCC53815

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Find us on:



www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk



Carlton



Above
Carlton RBCC53812

Right
Carlton RBCC53818



Above
Carlton RBCC53821



Carlton

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Breaking modulus	Conforms
4	Modulus of rupture	Conforms
8	Thermal expansion coefficient	$\leq 7 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
9	Thermal shock resistance	Resistant
11	Crazing resistance	Resistant
12	Frost resistance	Resistant
14	Stain resistance	Class 5
	Shade variation	V1 - RBCC53810 V3- All other colours
	Pendulum test - Slider 96 (Shod) Wet	$\geq 40\text{PTV}$
	Pendulum test - Slider 55 (Barefoot) Wet	$\geq 40\text{PTV}$

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

*** Lay with 5mm joint**

LRV and PTV values can vary batch to batch, please contact for advice.

Swatch colours may vary, samples should be requested.

Find us on:    