


Material: **Porcelain** | Appearance: **Pattern** | Application: **Walls and floors**



Sym 2.0


Sym 2.0 offers endless possibilities for creative customisation and distinctive designs. The collection includes ten carefully crafted patterns, all featuring a natural ≥ 36 PTV finish, ensuring both durability and style.

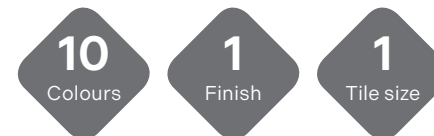


Shade variation: V2- Moderate



BMCB52110



BMCB52111




BMCB52112
LRV: 35



BMCB52113




BMCB52114



BMCB52115



BMCB52116



BMCB52117



BMCB52118



BMCB52119

1



	Sizes (mm)	> <	Finishes
1	200x200	8.2mm	NAT R10 ≥ 36 PTV



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.



Sym 2.0 BMCB52111 BMCB52113

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Sym 2.0



Above
Sym 2.0 BMCB52110 BMCB52111
BMCB52118

Right
Sym 2.0 BMCB52111 BMCB52117



Above
Sym 2.0 BMCB52110 BMCB52111



Sym 2.0

Technical data sheet - ISO 10545 average values

2	Sizes	Sizes $\pm 0.5\%$ Thickness $\pm 0.5\%$
3	Water absorption	0.28%
4	Breaking of rupture	>1300N
7	Surface abrasion	Class 4
12	Frost resistance	Resistant
13	Chemical resistance	LOW: GLA HIGH: GHA
14	Stain resistance	Class 5
	Slip resistance	Nat R10
	Pendulum test - Slider 96 (Shod)	Nat ≥ 36 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.